


1-pair, round type, PVC insulation, PVC sheath compensating cables

2 elemental compensating wires are insulated with PVC separately, stranded together with inclusion (A, B and C), shielded with tin-coated annealed copper wires (B), aluminum-Mylar drain wires (C) or copper tape (D), and coated with PVC at the outermost.

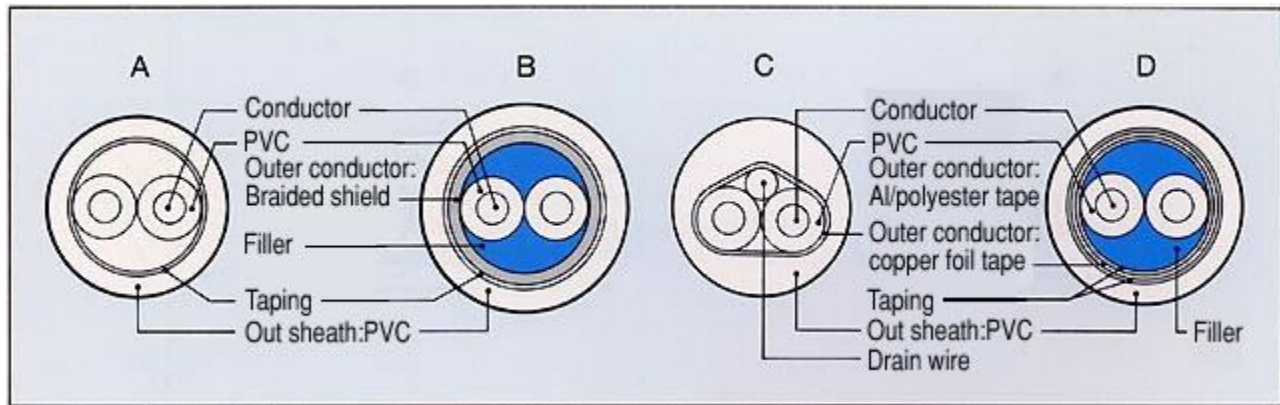

Parts No.	Construction	No. of pairs	Conductor		Insulation		Parts OD mm	Shield thickness mm	Sheath thickness mm	Finished OD mm
			Standing No./mm	OD mm	Thickness mm	OD mm				
12/0.18x1P □X-G=V■R	A	1	12/0.18	0.7	0.35	1.4	2.8	—	0.6	4.1
12/0.18x1P □X-G-IS=V■R	B	1	12/0.18	0.7	0.35	1.4	2.8	0.3	0.6	4.7
12/0.18x1P □X-G-AIS=V■R	C	1	12/0.18	0.7	0.35	1.4	2.8	0.03	0.6	4.0
7/0.3x1P □X-G=V■R	A	1	7/0.3	0.9	0.5	1.9	3.8	—	0.8	5.5
7/0.3x1P □X-G-IS=V■R	B	1	7/0.3	0.9	0.5	1.9	3.8	0.3	0.8	6.1
7/0.3x1P □X-G-AIS=V■R	C	1	7/0.3	0.9	0.5	1.9	3.8	0.03	0.8	5.5
20/0.18x1P □X-G=V■R	A	1	20/0.18	1.0	0.5	2.0	4.0	—	0.8	5.7
20/0.18x1P □X-G-IS=V■R	B	1	20/0.18	1.0	0.5	2.0	4.0	0.3	0.8	6.3
20/0.18x1P □X-G-AIS=V■R	C	1	20/0.18	1.0	0.5	2.0	4.0	0.03	0.8	5.7
30/0.18x1P □X-G=V■R	A	1	30/0.18	1.2	0.5	2.2	4.4	—	0.8	6.1
30/0.18x1P □X-G-IS=V■R	B	1	30/0.18	1.2	0.5	2.2	4.4	0.3	0.8	6.7
30/0.18x1P □X-G-AIS=V■R	C	1	30/0.18	1.2	0.5	2.2	4.4	0.03	0.8	6.1
7/0.45x1P □X-G=V■R	A	1	7/0.45	1.35	0.5	2.35	4.7	—	1.0	6.8
7/0.45x1P □X-G-IS=V■R	B	1	7/0.45	1.35	0.5	2.35	4.7	0.3	1.0	7.4
7/0.45x1P □X-G-AIS=V■R	C	1	7/0.45	1.35	0.5	2.35	4.7	0.03	1.0	6.8
7/0.45x1P □X-G-TIS=V■R	D	1	7/0.45	1.35	0.5	2.35	4.7	0.1	1.0	7.7
4/0.65x1P □X-G=V■R	A	1	4/0.65	1.57	0.6	2.77	5.54	—	1.0	7.6
4/0.65x1P □X-G-IS=V■R	B	1	4/0.65	1.57	0.6	2.77	5.54	0.3	1.0	8.3
4/0.65x1P □X-G-AIS=V■R	C	1	4/0.65	1.57	0.6	2.77	5.54	0.03	1.0	7.6
4/0.65x1P □X-G-TIS=V■R	D	1	4/0.65	1.57	0.6	2.77	5.54	0.1	1.0	8.5
7/0.65x1P □X-G=V■R	A	1	7/0.65	1.95	0.6	3.15	6.3	—	1.0	8.4
7/0.65x1P □X-G-IS=V■R	B	1	7/0.65	1.95	0.6	3.15	6.3	0.3	1.0	9.0

7/0.65x1P □X-G-AIS=V■R	C	1	7/0.65	1.95	0.6	3.15	6.3	0.03	1.0	8.4
7/0.65x1P □X-G-TIS=V■R	D	1	7/0.65	1.95	0.6	3.15	6.3	0.1	1.0	9.3

Please fill in □ with a type of a compensation cable (first two alphabets of the symbol) to order.

Please fill in ■ with symbols of an insulator and a PVC: Regular PVC = V, Flame retardant heat-resistant PVC = V1, Soft PVC = V3

We also manufacture outer shields for tin-coated annealed copper wires (OS) and for stainless wires (SOS).

Please contact us with any requests.