


1-pair, flat type, silicon insulation, silicon sheath compensating cables

2 elemental compensating wires are insulated with silicone separately, bound in parallel, shielded with tin-coated annealed copper wires (B), coated with silicone, and braided with stainless wires (C) for protection at the outermost.

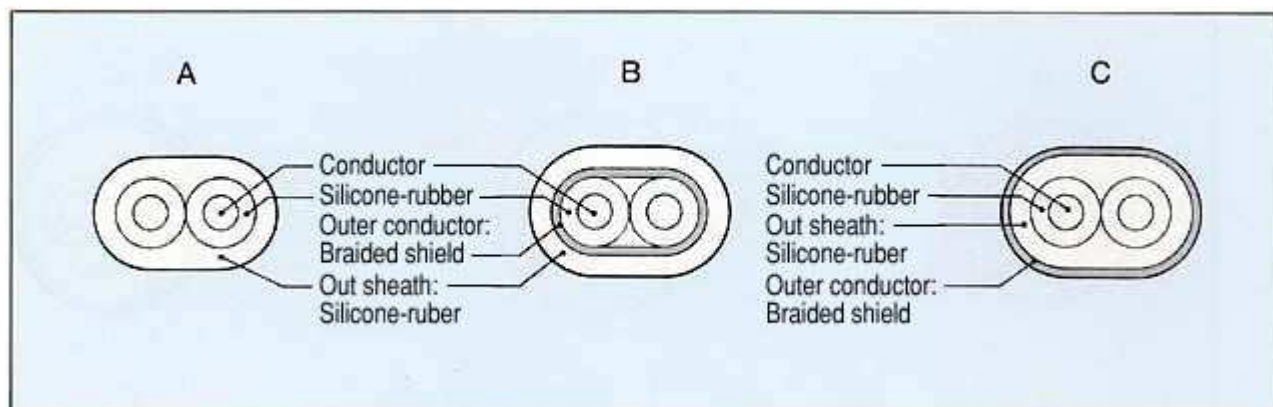

Parts No.	Construction	No. of pairs	Conductor		Insulation		OD of pair mm	Shield thickness mm	Sheath thickness mm	Outer shield thickness mm	Finished OD mm
			Standing No./mm	OD mm	Thickness mm	OD mm					
12/0.18x1P □X-SR	A	1	12/0.18	0.7	0.35	1.4	1.4x2.8	—	0.6	—	2.6x4.0
12/0.18x1P □X-SR-IS	B	1	12/0.18	0.7	0.35	1.4	1.4x2.8	0.3	0.6	—	3.2x4.6
12/0.18x1P □X-SR-SOS	C	1	12/0.18	0.7	0.35	1.4	1.4x2.8	—	0.6	0.3	3.2x4.6
7/0.3x1P □X-SR	A	1	7/0.3	0.9	0.5	1.9	1.9x3.8	—	0.7	—	3.3x5.2
7/0.3x1P □X-SR-IS	B	1	7/0.3	0.9	0.5	1.9	1.9x3.8	0.3	0.7	—	3.9x5.8
7/0.3x1P □X-SR-SOS	C	1	7/0.3	0.9	0.5	1.9	1.9x3.8	—	0.7	0.3	3.9x5.8
20/0.18x1P □X-SR	A	1	20/0.18	1.0	0.45	1.9	1.9x3.8	—	0.7	—	3.3x5.2
20/0.18x1P □X-SR-IS	B	1	20/0.18	1.0	0.45	1.9	1.9x3.8	0.3	0.7	—	3.9x5.8
20/0.18x1P □X-SR-SOS	C	1	20/0.18	1.0	0.45	1.9	1.9x3.8	—	0.7	0.3	3.9x5.8
30/0.18x1P □X-SR	A	1	30/0.18	1.2	0.5	2.2	2.2x4.4	—	0.8	—	3.8x6.0
30/0.18x1P □X-SR-IS	B	1	30/0.18	1.2	0.5	2.2	2.2x4.4	0.3	0.8	—	4.4x6.6
30/0.18x1P □X-SR-SOS	C	1	30/0.18	1.2	0.5	2.2	2.2x4.4	—	0.8	0.3	4.4x6.6
7/0.45x1P □X-SR	A	1	7/0.45	1.35	0.6	2.55	2.55x5.1	—	1.0	—	4.6x7.1
7/0.45x1P □X-SR-IS	B	1	7/0.45	1.35	0.6	2.55	2.55x5.1	0.3	1.0	—	5.2x7.7
7/0.45x1P □X-SR-SOS	C	1	7/0.45	1.35	0.6	2.55	2.55x5.1	—	1.0	0.3	5.2x7.7
4/0.65x1P □X-SR	A	1	4/0.65	1.57	0.6	2.77	2.77x5.54	—	1.0	—	4.8x7.5
4/0.65x1P □X-SR-IS	B	1	4/0.65	1.57	0.6	2.77	2.77x5.54	0.3	1.0	—	5.4x8.1
4/0.65x1P □X-SR-SOS	C	1	4/0.65	1.57	0.6	2.77	2.77x5.54	—	1.0	0.3	5.4x8.1
7/0.65x1P □X-SR	A	1	7/0.65	1.95	0.6	3.15	3.15x6.3	—	1.0	—	5.2x8.3
7/0.65x1P □X-SR-IS	B	1	7/0.65	1.95	0.6	3.15	3.15x6.3	0.3	1.0	—	5.8x8.9
7/0.65x1P □X-SR-SOS	C	1	7/0.65	1.95	0.6	3.15	3.15x6.3	—	1.0	0.3	5.8x8.9

Please fill in □ with a type (symbol) of a compensating cable to order.

We also manufacture outer shields for tin-coated annealed copper wires (OS). Please contact us with any requests.

Our silicone-rubber compensating cables are well received in the market, because of their purpose-specific constructions/structures. Please contact us with any requests.