

THERMOCOUPLE WIRE

PVC Insulated Rip Cord 221°F (105°C)

Applications


- Temperature Sensors
- Testing
- Laboratories
- Transportation
- Heating and ...Air Conditioning
- Appliances
- Validation

Available Options

- Tighter than Special Limit ...Accuracy Tolerances
- Special Color Codes
- Calibration Test Reports

Product Features

- Continuous use up ...to 221F (105C)
- Flame Retardant
- Small Compact Size
- Individual Insulation
- ...Color Coded
- Economical Construction
- Flexible
- Rip Design for Easy ...Conductor Separation

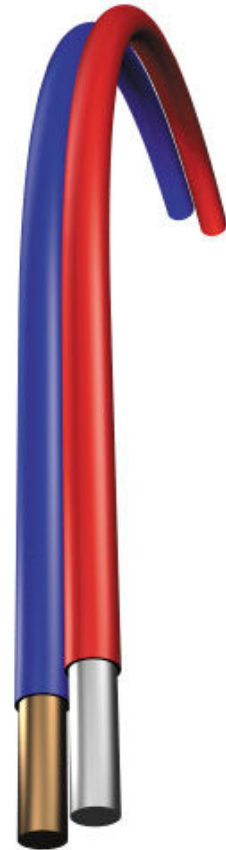

Product Specifications

Conductors: Solid or stranded thermocouple wire per ASTM E230 & ANSI MC96.1

Insulation: Flame retardant PVC

Construction: Parallel conductors bonded together

Operating Temperature: -15F (-26C) to +221F (+105C) continuous

Limits of Error: Conforms to ASTM E230, IEC 584 and ANSI MC 96.1

Color Code: Conforms to ASTM E230 and ANSI MC 96.1 (International Color Codes Available)

Ordering Code

