



## Pulse isolator

### 9202A

- Interface for NAMUR sensors and switches
- Extended self-diagnostics and detection of cable fault
- 1 or 2 channels
- Can be supplied separately or installed on power rail, PR type 9400
- SIL 2-certified via Full Assessment



#### Advanced features

- Configuration and monitoring by way of detachable display front (PR 45xx).
- Selection of direct or inverted function for each channel via PR 45xx.
- Advanced monitoring of internal communication and stored data.
- Optional redundant supply via power rail and/ or separate supply.
- SIL 2 functionality is optional and must be activated in a menu point.

#### Application

- 9202A can be mounted in the safe area and in zone 2 / Class 1, Division 2, Group A, B, C, D.
- Pulse isolator for transmission of signals from NAMUR sensors and mechanical switches.
- Monitoring of error events and cable breakage via the individual status relay and/or a collective electronic signal via the power rail.
- The 9202A has been designed, developed and certified for use in SIL 2 applications according to the requirements of IEC 61508.
- Suitable for the use in systems up to Performance Level "d" according to ISO-13849.



#### Technical characteristics

- 1 green and 2 yellow/red front LEDs indicate operation status and malfunction.
- 2.6 kVAC galvanic isolation between input, output and supply.

#### Mounting

- The devices can be mounted vertically or horizontally without distance between neighbouring units.

#### Applications

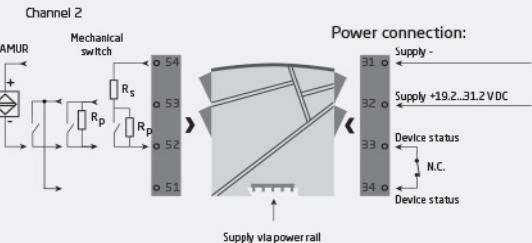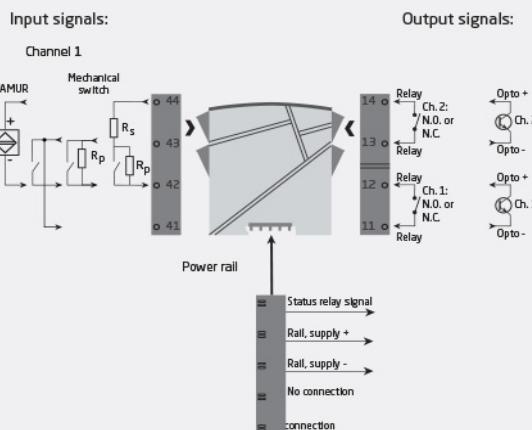

Zone 2 & Cl. 1, Div. 2, gr. A-D or Safe Area

## Order

Type	Associated apparatus	Version	Unit channels	I.S. / Ex approvals
9202	No : A	Opto : 1	Single : A	ATEX, IECEx, FM, INMETRO, EAC-Ex :-
		Relay N.O. : 2	Double : B	cULus, ATEX, IECEx, FM, INMETRO, EAC-Ex : -U9
		Relay N.C. : 3		

Example: 9202A2B

## Environmental Conditions

Operating temperature.....	-20°C to +60°C
Storage temperature.....	-20°C to +85°C
Calibration temperature.....	20...28°C
Relative humidity.....	< 95% RH (non-cond.)
Protection degree.....	IP20
Installation in.....	Pollution degree 2 & meas. / overvoltage cat. II

## Mechanical specifications

Dimensions (HxWxD).....	109 x 23.5 x 104 mm
Dimensions (HxWxD) w/ 4501/451x.....	109 x 23.5 x 116 / 131 mm
Weight approx.....	170 g
Weight incl. 4501 / 451x (approx.).....	185 g / 200 g
DIN rail type.....	DIN EN 60715/35 mm
Wire size.....	0.13...2.08 mm <sup>2</sup> AWG 26...14 stranded wire
Screw terminal torque.....	0.5 Nm
Vibration.....	IEC 60068-2-6
2...13.2 Hz.....	±1 mm
13.2...100 Hz.....	±0.7 g

## Common specifications

### Supply

Supply voltage.....	19.2...31.2 VDC
Fuse.....	400 mA SB / 250 VAC
Max. required power.....	≤ 1.1 W...≤ 1.3 W / ≤ 1.5 W...≤ 1.9 W (1 / 2 ch.)
Max. power dissipation, 1 / 2 ch.....	≤ 1.2 W / ≤ 1.6...1.8 W

### Isolation voltage

Test /working: Input to any.....	2.6 kVAC / 300 VAC reinforced isolation
Output 1 to output 2.....	1.5 kVAC / 150 VAC reinforced isolation
Status relay to supply.....	1.5 kVAC / 150 VAC reinforced isolation

### Auxiliary supplies

NAMUR supply.....	8 VDC / 8 mA
Programming.....	PR 45xx
Response time for cable fault.....	< 200 ms

## Input specifications

Sensor types.....	NAMUR according to EN 60947-5-6 / mechanical contact
Frequency range.....	0...5 kHz
Min. pulse length.....	> 0.1 ms
Input resistance.....	Nom. 1 kΩ
Trig level, signal.....	< 1.2 mA, > 2.1 mA
Trig level, cable fault.....	< 0.1 mA, > 6.5 mA

## Output specifications

### Relay output

Max. switching frequency.....	20 Hz
Max. voltage.....	250 VAC / 30 VDC
Max. current.....	2 AAC / 2 ADC
Max. AC power.....	500 VA / 60 W

### Status relay

Max. voltage.....	125 VAC / 110 VDC
Max. current.....	0.5 AAC / 0.3 ADC
Max. AC power.....	62.5 VA / 32 W

### NPN outputs

Max. switching frequency.....	5 kHz
Min. pulse length.....	> 0.1 ms
Max. load, current / voltage.....	80 mA / 30 VDC
Voltage drop at 80 mA.....	< 2.5 VDC

## Observed authority requirements

EMC.....	2014/30/EU
LVD.....	2014/35/EU
ATEX.....	2014/34/EU
RoHS.....	2011/65/EU
EAC.....	TR-CU 020/2011
EAC Ex.....	TR-CU 012/2011
EAC LVD.....	TR-CU 004/2011

## Approvals

ATEX.....	KEMA 07ATEX0146 X
IECEx.....	KEM 06.0039X
c FM us.....	FM19US0055X / FM19CA0028X
c UL us, UL 61010-1.....	E314307
c UL us, UL 913.....	E233311 (only 9202xxx-U9)
EAC Ex.....	RU C-DK.HA65.B.00355/19
DNV-GL Marine.....	TAA00000JD
ClassNK.....	TA18527M
SIL.....	SIL 2 certified & fully assessed acc. to IEC 61508